

NEXACORE 600 SPC

LUXURY SPC
FLOORING

NEW
HORIZONS

NEXACORE NEXACORE
ACORE NEXACORE NEX
NEXACORE NEXACORE
ACORE NEXACORE NEX
NEXACORE NEXACORE
ACORE NEXACORE NEX
NEXACORE NEXACORE
ACORE NEXACORE NEX
NEXACORE NEXACORE
ACORE NEXACORE NEX
NEXACORE NEXACORE
ACORE NEXACORE NEX
NEXACORE NEXACORE

 TACO

WOOD SERIES

Wear Layer	0.5mm	Size	172mm x 1210mm
Thickness	6.0mm (5.0mm core + 1.0mm IXPE)	10 pieces/box	2.08sqm



TV 6001 SPC Ivory Ash



TV 6002 SPC Champagne Oak



TV 6003 SPC Amber Elm

WOOD SERIES


Wear Layer	0.5mm	Size	172mm x 1210mm
Thickness	6.0mm (5.0mm core + 1.0mm IXPE)	10 pieces/box	2.08sqm



TV 6004 SPC Reserve Oak



TV 6005 SPC Auburn Oak

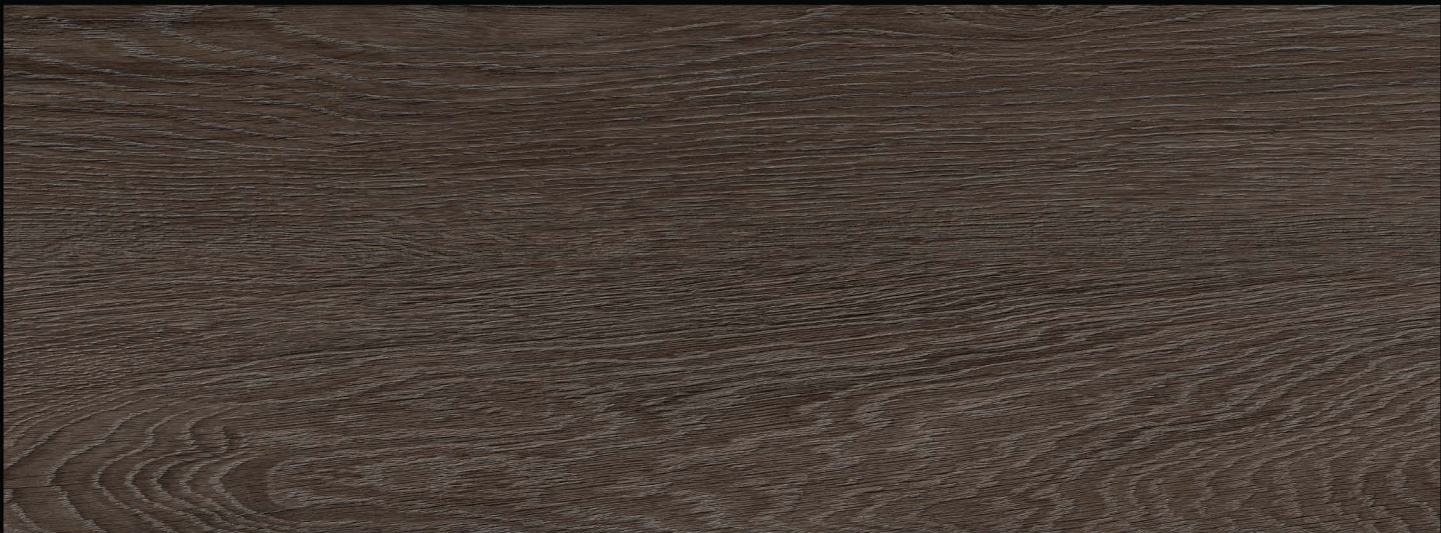

TV 6006 SPC Ebony Oak

Technical Data

Test Items	Test Results	Test Methods
Hardness	98	GB/T2411-2008
	99.5	
	99	
Density	1.3	ASTM D573
Lead (Pb)	< 10 mg/kg	IEC 62321-5:2013
Cadmium (Cd)	< 10 mg/kg	IEC 62321-5:2013
Mercury (Hg)	< 10 mg/kg	IEC 62321-4:2013
Hexavalent Chromium (Cr VI)	< 10 mg/kg	IEC 62321-7-2:2017
Polybrominated Biphenyls (PBBs)	< 5 mg/kg	IEC 62321-6:2015
Polybrominated Diphenyl Ethers (PBDEs)	< 5 mg/kg	IEC 62321-6:2015
Dibutyl phthalate (DBP)	< 30 mg/kg	IEC 62321-8:2017
Benzylbutyl phthalate (BBP)	< 30 mg/kg	IEC 62321-8:2017
Bis-(2-ethylhexyl) phthalate (DEHP)	< 30 mg/kg	IEC 62321-8:2017
Diisobutyl phthalate (DIBP)	< 30 mg/kg	IEC 62321-8:2017

- Delivers outstanding rigidity and impact tolerance for heavy trolleys, racks, and static loads.
- Remains flat and stable in high-traffic areas, such as entrances and corridors.
- Equipped with anti-bacterial properties, making it safe for enclosed interior applications.
- Combines anti-slip protection and acoustic comfort for public and commercial spaces.

Performance You Can Trust.
Built for heavy-duty use, Nexacore 600 SPC delivers superior strength with resistance to heat, moisture, and bacteria.



Scan to contact us
on WhatsApp

